

Technical Data Sheet

Roof Coat

Description


Diamond Roof Coat is a special purpose acrylic elastomeric roof coating that keeps water and sunlight off your roof.

Directions and application procedure:

- 1) Apply with roller or brush.
- 2) For The first thin coat, dilute The paint in 1:2 ratio with clean water (1 Part Paint : 2 Parts Water), apply with brush in such a way that the paint can penetrate into small pores to make it completely waterproof.
- 3) For 2nd and 3rd coats, thin the paint in 1:1 ratio with water (1 Part Paint : 1 Part Water), apply with roller in a cross-hatch pattern resulting in a total dry film thickness of 1 mm.
- 4) Interval between coats 8 to 12 hours.
- 5) Late afternoon application is not recommended if high humidity conditions exist, as that could cause high moisture concentration in the surface overnight.
- 6) Do not apply when the surface or air temperature is below 50°F (10°C) or if rain, snow or heavy dew is expected within 48 hours.

Drying Time

- 1) AT 77°F (25°C), the paint dries to touch in two hours and to recoat in eight hours. Low temperature, high humidity and poor ventilation will increase recoat intervals.

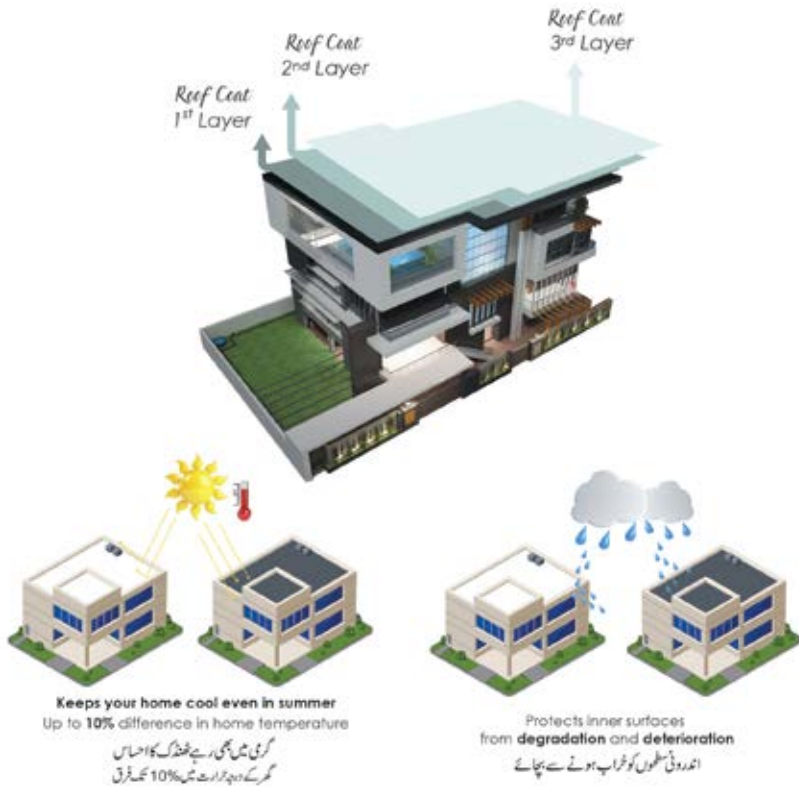

Roof Coat



Storage

The product must be stored in accordance to the national regulations. The product should be kept in a well-ventilated place, protected from heat and direct sunlight. The containers must be kept tightly closed.

Handling

Handle with care. Stir well before use.

Packing Size

3.64 Lits and 14.56 Lits

Health and Safety

Material health and safety data sheet is available upon request. Please observe the precautionary notice displayed on the container. Ensure proper ventilation during application and drying of paint. Avoid inhalation of paint mist and vapours and skin contact. Spillage of paint on skin should immediately be removed with suitable cleanser soap and water. Eyes should be well flushed with water and immediate medical attention should be sought.



The No. 1 Selling National Brand